

V-TAL

NICE LEVER

1/4 ton → 9 ton

NR2

**NICE POWER!
NICE POWER!**



Nice Lever offers following exceptional features!

1. Automatic switching to free pulley mode.

Simply remove the load from the bottom hook and pull the chain to automatically switch to free pulley mode. The winch automatically switches back to normal mode when a load is placed on the bottom hook. Automatic switching greatly improves work efficiency.

2. Easy maintenance.

The free pulley mechanism has only a few parts, making disassembly and repair a quick and easy process.

3. Plated chain.

The winch chain is tough-pitch plated to prevent rusting and ensure continuous smooth operation.

4. Locked chain release mechanism.

If the chain locks due to an impacting load, simply move the lever by hand to release the chain.

5. Knobbed hook.

The winch hook is equipped with an anti-slip knob. Even if the hook is stretched slightly, the wire rope catches on the anti-slip knob to prevent it from slipping off the hook, ensuring safe operation.

Automatic free pulley requires no special release operation. Greatly improves work efficiency!

The best you'll find.



Patented Device


NR2:250kg[petit]

For Lifting, Lowering, Fastening and Pulling.


V-TAL LEVER Lever hoists

Idling operation:

1. Depress the retaining pawl all the way down and pull the grip ring towards you.
2. The chain can be adjusted up and down by hand.
3. To terminate the idling. Set the change lever in the down (↓) position. (See diagram at left). Then, depressing the retaining pawl as far as possible, push the grip ring gently so as to let the pawl engage the outer edge of the retaining plate. Next, grip the grip ring and handle with a single hand and push them while turning them counterclockwise. The retaining pawl returns to its original position.



Model number	VR2-03	VR2-05	VR2-08	VR2-15	VR2-30	VR2-60	VR2-90	
Capacity (t)	0.25	0.5	0.75	1.5	3	6	9	
Standard lift (m)	1	1.5	1.5	1.5	1.5	1.5	1.5	
Net weight (kg)	1.8	4	7.7	11.8	21	32	47	
Minimum distance between hooks (mm)	230	260	320	380	480	600	700	
Pull on lever to lift full load	(kgf)	25	34.6	14.5	24.5	32.6	34.7	36.7
	(N)	245	340	140	240	320	340	360
Chain thickness (mm)	4	5	6	8	10	10	10	
Dimensions	a (mm)	92	105	155	180	215	215	215
	b (mm)	85	95	135	155	200	200	330
	c (mm)	230	260	320	380	480	600	760
	d (mm)	160	300	285	370	410	410	410
	g (mm)	25	30	30	36	40	50	64

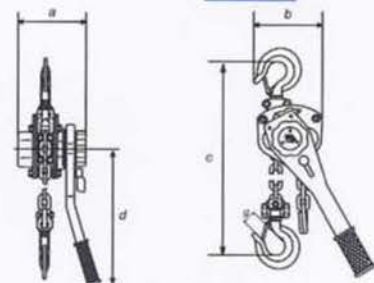

V-tal offers products that are designed for longtime use, providing the lowest possible per-use cost.