




# Eoofali Esmailji Karachiwalla & Co.

43/45 Narayan Rao Koli Marg (Bhandari St.), PO Box 13062. Mandvi. Mumbai 400003. INDIA.  
 Tel: +91-22-23444586/23421617/23450667/23429167 Fax:+91-22-23439128  
 Email: [mail@eekarachiwala.com](mailto:mail@eekarachiwala.com) Web: [www.eekarachiwala.com](http://www.eekarachiwala.com)  
 Agents for: Usha Martin Wire Ropes, Vankos Hydraulic Jacks, Indef Chain Pulley Blocks, Swiftom, Omega, Maxpull.



Est'd. 1910

## MULTIPLE PART WIRE ROPE SLINGS

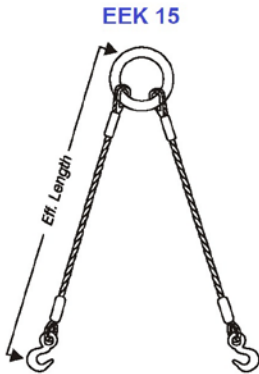


**EEK 15**  
Two leg wire rope sling with main ring at top and hooks at the bottom.




**EEK 16**  
Three leg wire rope sling with main ring at top and thimble at the bottom.



**EEK 17**  
Four leg wire rope sling with main ring and intermediate ring at top with bow shackle at bottom.



**EEK 18**  
Four leg sling with main ring with thimble at top and plain loops at bottom.

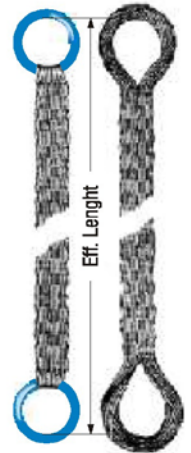

Master links also available in the following varieties



Oval type



Pear shaped

For other combination of multi-leg slings refer our catalogue

Braided / Plaited belt lifting slings - Available in standard lts. of 10m & 10" in capacities ranging from 10 to 40 tons with steel core ropes.

### MULTIPLE LEG SLINGS

Rope Dia. (mm)	6 x 19 / 6 x 36 Groups Steel Core							6 x 19 / 6 x 36 Groups Fibre Core						
	Single Leg	Safe Working Load			Minimum Breaking Load	Proof Load	Single Leg	Safe Working Load			Minimum Breaking Load	Proof Load		
		2 Leg	3&4 Leg	2 Leg				3&4 Leg	2 Leg	3&4 Leg				
6	0.5	0.7	1.1	0.5	0.8	2.6	1.0	0.4	0.6	0.8	0.4	0.6	2.0	0.8
8	0.8	1.2	1.8	0.8	1.3	4.2	1.7	0.8	1.1	1.6	0.8	1.2	3.9	1.5
9	1.1	1.5	2.2	1.1	1.6	5.3	2.1	1.0	1.4	2.1	1.0	1.5	4.9	2.0
10	1.3	1.9	2.8	1.3	2.0	6.6	2.6	1.2	1.7	2.6	1.2	1.8	6.1	2.4
12	1.9	2.7	4.0	1.9	2.8	9.5	3.8	1.8	2.5	3.7	1.8	2.6	8.8	3.5
13	2.2	3.1	4.7	2.2	3.3	11.3	4.4	2.1	2.9	4.3	2.1	3.1	10.3	4.1
14	2.6	3.6	5.4	2.6	3.9	13.0	5.2	2.4	3.3	5.0	2.4	3.6	11.9	4.8
16	3.4	4.7	7.1	3.4	5.0	16.8	6.7	3.1	4.4	6.6	3.1	4.7	15.6	6.2
18	4.3	6.0	8.9	4.3	6.4	21.3	8.5	4.0	5.5	8.3	4.0	5.9	19.8	7.9
19	4.8	6.7	10.0	4.8	7.1	23.8	9.5	4.4	6.2	9.2	4.4	6.6	22.0	8.8
20	5.3	7.4	11.0	5.3	7.9	26.3	10.5	4.9	6.8	10.2	4.9	7.3	24.4	9.7
22	6.4	8.9	13.4	6.4	9.5	31.8	12.7	5.9	8.2	12.4	5.9	8.8	29.5	11.8
24	7.2	10.1	15.1	7.2	10.8	36.0	14.4	7.0	9.8	14.7	7.0	10.5	35.1	14.0
25	7.6	10.6	16.0	7.6	11.4	38.0	15.2	7.5	10.5	15.8	7.5	11.3	37.5	15.0
26	8.7	12.2	18.2	8.7	13.0	43.4	17.4	8.1	11.3	16.9	8.1	12.1	40.3	16.1
28	10.1	14.1	21.1	10.1	15.1	50.4	20.1	9.3	13.1	19.6	9.3	14.0	46.7	18.7
32	13.2	18.4	27.7	13.2	19.8	65.9	26.3	12.2	17.1	25.6	12.2	18.3	61.0	24.4
35	15.7	22.0	33.1	15.7	23.6	78.7	31.5	14.4	20.2	30.2	14.4	21.6	72.0	28.8
38	18.6	26.0	39.0	18.6	27.8	92.8	37.1	17.6	24.6	37.0	17.6	26.4	88.0	35.2
40	20.6	28.8	43.2	20.6	30.9	102.9	40.1	18.4	25.8	38.7	18.4	27.7	92.2	36.9
44	24.9	34.8	52.3	24.9	37.3	124.5	49.8	23.1	32.3	48.4	23.1	34.6	115.3	46.1
50	34.8	48.7	73.0	34.8	52.1	173.8	69.5	27.4	38.4	57.6	27.4	41.1	137.1	54.8
56	40.3	56.5	84.7	40.3	60.5	201.6	80.7	37.0	51.8	77.7	37.0	55.5	185.0	74.0
64	52.7	73.7	110.6	52.7	79.0	263.3	105.3	48.0	67.2	110.8	48.0	72.0	240.0	96.0
70	65.0	91.0	136.5	65.0	97.5	325.0	130.0	55.0	77.0	115.5	55.0	82.5	275.0	110.0

FACTOR OF SAFETY 5:1 TENSILE STRENGTH : 1770/1960 N/mm<sup>2</sup>

